

10/06/99  
JC586 U.S. PTO

PATENT

A

APPLICATION FOR U.S. PATENT  
TRANSMITTAL FORM

Box Patent Application  
THE COMMISSIONER OF PATENTS  
AND TRADEMARKS  
Washington, D.C. 20231

Attorney Docket No.  
062891.0340

JC678 U.S. PTO  
09/414082  
10/06/99

Sir:

Transmitted herewith for filing is the patent application  
of:

Inventors: Buckland, et al.

For: METHOD FOR USING A PRE-CONFIGURED TDM SWITCH AND  
TRAFFIC DISCARD TO FACILITATE UPSR SELECTION


Enclosed are: 1 Sheet of Formal Drawings

FEE CALCULATION					FEE
	Number		Number Extra	Rate	Basic Fee \$760.00
Total Claims:	26	- 20 =	6	X \$18 =	\$108.00
Independent Claims	3	- 3 =	0	X \$78 =	\$0.00
TOTAL FILING FEE =					\$868.00

Enclosed is a check in the amount of \$868.00. Please charge  
any additional fees or credit any overpayment to Deposit Account  
No. 02-0384 of BAKER & BOTTS, L.L.P.

BAKER & BOTTS, L.L.P.  
Attorneys for Applicants

October 6, 1999  
Date

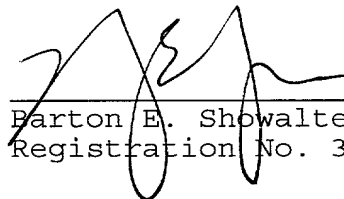  
Barton E. Showalter  
Registration No. 38,302

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Buckland, et al.  
Date Filed: October 6, 1999  
Title: METHOD FOR USING A PRE-CONFIGURED  
TDM SWITCH AND TRAFFIC DISCARD TO  
FACILITATE UPSR SELECTION

**BOX PATENT APPLICATION**

Honorable Assistant Commissioner  
For Patents  
Washington, D.C. 20231

Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that the attached Patent Application, Declaration and Power of Attorney, 1 sheet of Formal Drawings, Assignment, Assignment Cover Sheet, a check in the amount of \$40.00 to cover the assignment recording fee, Fee Transmittal, a check in the amount of \$868.00 to cover the application filing fee, and this Certificate of Mailing are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on this 6th day of October, 1999 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

  
\_\_\_\_\_  
Willie Jiles

Express Mail Receipt  
No. EM 426629412 US  
Attorney's Docket:  
062891.0340

669007" 28047460

1

METHOD FOR USING A PRE-CONFIGURED TDM SWITCH AND  
TRAFFIC DISCARD TO FACILITATE UPSR SELECTION

CROSS-REFERENCE TO RELATED APPLICATIONS

5 This application is filed concurrently with a  
commonly-owned application entitled METHOD FOR USING A  
PRE-CONFIGURED ATM SWITCH AND TRAFFIC DISCARD TO  
FACILITATE UPSR SELECTION.

TECHNICAL FIELD OF THE INVENTION

10 This invention relates to technology in a digital  
network and more particularly to techniques for  
protection switching of SONET UPSR.

0544083.100599  
062891.0340

BACKGROUND OF THE INVENTION

The synchronous optical network (SONET) standards for optical transmission include a number of mechanisms and recommendations for protecting transmitted traffic. These include making use of "rings" that contain all of the transmission termination points. Such rings provide two paths between each transmission point on the ring, thus providing a level of redundancy. There are two basic ways to exploit SONET rings to protect traffic: a uni-directional path switched ring (UPSR) and a bi-directional line switched ring (BLSR).

A UPSR operates by having two copies of the same traffic go in opposite directions from one side of a SONET ring to the other. At the exit point from the ring, the traffic from the two directions is compared, and the better version is selected for output. This approach can be utilized for time division multiplexed (TDM) traffic using virtual tributary (VT) comparison. Specifically, the overhead associated with each VT that provides performance indications is inspected to determine which path exhibits better performance by whatever performance criteria is chosen.

Traditional approaches to UPSR for TDM involve switch reconfiguration. Specifically, a TDM switch is provided at the ring node where the VT is being extracted from the ring. The TDM switch is configured to switch the TDM traffic from one of the two VT copies through to a destination. When the VT performance measures indicate that the VT copy being discarded has become the superior or preferred version of the two VT copies, the TDM switch is reconfigured to switch through this VT copy and to

ignore the original VT copy. Such reconfigurations can be carried out indefinitely.

5 This type of TDM switch reconfiguration approach severely taxes the processing resources, such as a microprocessor (or other computing entity) that is controlling the switch. Reconfiguration is often a computationally involved task. The SONET standards require that switch reconfiguration occur within 50 ms of the failure of a transmission link that is carrying the  
10 active VT copy. This standard may not always be met under certain conditions.

09414082 100599

SUMMARY OF THE INVENTION

According to the invention, SONET UPSR protection is effected by configuring a TDM switch to route TDM traffic from two receive circuits to the same destination. Based on UPSR traffic qualification, one copy of this traffic is discarded in the TDM switch so that only a single copy is passed to the TDM switch. Based upon received performance measurements, the circuit performing the discard operation can change. The same or similar mechanism can be used to protect against equipment failure and accommodate removal of one of the receive circuits.

In a particular embodiment, an apparatus includes a number of receive circuits coupled to monitor signals on respective paths to a TDM switch. Each receive circuit sets a kill-bit to accompany TDM traffic sent to the TDM switch to indicate whether the TDM traffic should be switched or discarded. A memory coupled to the receive circuits receives the TDM traffic with accompanying kill-bits and stores the TDM traffic having an accompanying kill-bit that has not been set. The memory discards the TDM traffic having an accompanying kill-bit that has been set. A communication path between the receive circuits conveys qualifying information for the paths.

This overall approach, including configuration of the TDM switch such that it routes both VT copies through to the destination, allows for very fast switch-overs between VT copies. These switch-overs are achieved using decentralized processing in the receive circuits, with controlling messages sent between those circuits. Therefore, the processing drain for any microprocessor

controlling the TDM switch due to switch-overs may be reduced or eliminated. Other technical advantages are readily apparent to one skilled in the art from the following description, figures, and claims.

062891.0340

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, and for further features and advantages, reference is now made to the following description taken  
5 in conjunction with the accompanying drawings, where like reference numerals represent like parts, in which:

FIGURE 1 is a block diagram of a TDM communication network according to the invention; and

10 FIGURE 2 is a block diagram of components in a node of the network illustrating the function of a TDM switch in accordance with the present invention.

659001" 2804160



DETAILED DESCRIPTION OF THE INVENTION

FIGURE 1 is a block diagram of a TDM communication network 10 according to the invention. The nodes 12, 14, 16 and 18 may each include TDM switches as described below. Signal source 13 routes its traffic into node 12 which directs duplicate signals to node 18 via two paths, one through node 14 and node 16 and the other to node 18. Node 18 receives both signals, selects the best or preferred signal, and routes the selected signal to a destination 19.

Referring to FIGURE 2, at node 18, a TDM switch 22 can switch both VT copies through to destination 19. Kill-bits inserted by receive circuits 24, 26 control which VT copy is actually switched through on a byte-by-byte basis. In a particular embodiment, VT copies sent from receive circuits 24, 26 include the original eight bits and an additional kill-bit (nine bits total).

Receive circuits 24, 26 couple to a memory 20 for storing and forwarding traffic to TDM switch 22. Memory 20 stores an eight bit value for communication to TDM switch 22 if the kill-bit (9th bit) is not set. If the kill-bit is set, memory 20 discards or does not write the corresponding eight bit value to memory. Receive circuits 24, 26 exchange messages using bus 34 and/or link 38 to determine, based on VT performance measurements, the better VT copy. Based on this determination, one of the two receive circuits 24, 26 sets kill-bits to prevent writing of VT copies to memory 20. The other receive circuit 24, 26 does not set kill-bits so that its VT copies are written to memory 20 and passed to TDM switch 22. The receive circuit 24, 26 that

sets kill-bits to indicate discard can change based on changes in VT performance measurements.

For the purposes of selecting between two copies, VTs and STS-1 paths are qualified using the following criteria:

1. Alarm indication signal (AIS), loss of pointer (LOP), or terminating circuit card missing;
2. Bit error rate (BER) exceeding  $10^{-3}$  in the path, or other selected value; and
3. Signal degradation (SD) resulting from a BER exceeding  $10^{-5}$  to  $10^{-9}$ , or other selected value.

To perform the VT qualification, each receive circuit 24, 26 includes a decision module 30, 32 having memory and processing capabilities to perform the VT qualification. Decision modules 30, 32 each communicate information using bus 34 supported by control module 36. In a particular embodiment, bus 34 is functionally a cross-connect DS-0 implemented using a time-slot interchanger in control module 36. Decision modules 30, 32 may also communicate information for VT qualification using link 38 between receive circuits 24, 26. In one embodiment, link 38 supports a periodic keep-alive signal between receive circuits 24, 26 to detect equipment failure and/or removal, whereas bus 34 supports communication of qualification criteria between circuits 24, 26, such as AIS, LOP, BER, and SD.

In a particular embodiment, communications between receive circuits 24, 26 occur in a master/slave environment. For purposes of this discussion assume receive circuit 24 is the master circuit, while receive circuit 26 is the slave circuit. In this embodiment,

receive circuit 26 reports the qualification status of each VT upon which it receives traffic. Receive circuit 24 also determines the qualification status of each VT upon which it receives traffic, and also receives reports from receive circuit 26. Receive circuit 24 then selects, based on the qualification criteria, the active receive circuit 24, 26 to pass the VT traffic to TDM switch 22. The designation of master and slave may not change, but the active and stand-by status of receive circuits 24, 26 for passing particular VT traffic may change.

In operation, each receive circuit 24, 26 determines the VT for each received telephony byte, block, packet, or other portion of information, and performs a look-up in a table maintained by decision modules 30, 32. For each VT, the table includes a pass-through bit or other indicator specifying whether the particular VT carries pass-through traffic not intended for destination 19. For example, pass-through traffic may include information passed through node 18 from node 16 to node 12 or information passed through node 18 from node 12 to node 16. If the pass-through bit indicates pass-through traffic, then no further VT qualification processing is performed. In a particular embodiment, control module 36 populates tables maintained by decision modules 30, 32 with pass-through bits for each provisioned VT. If the pass-through bit for the determined VT indicates that information is to be routed to destination 19, then a qualification bit or other indicator specifies which receive circuit 24, 26 is currently active (passing

traffic to TDM switch 22) and which receive circuit 24, 26 is stand-by (discarding traffic).

5 In the particular embodiment illustrated in FIGURE 2, receive circuit 24 receives a telephony byte from node 16 on a particular VT, and decision module 30 performs a table look-up using the VT to determine that this byte is not pass-through (e.g., pass-through bit is set to zero), and that receive circuit 24 is active (e.g., qualification bit is set to one). As a result, receive  
10 circuit 24 does not set the kill-bit so that memory 20 stores the byte for communication to TDM switch 22. Receive circuit 26 receives a copy of the byte from node 12, performs a table look-up at decision module 32 using the same VT, and determines that this is not pass-through  
15 traffic, but that receive circuit 26 is stand-by for this particular VT. As a result, receive circuit 26 sets the kill-bit so that memory 20 does not store the byte.

For a variety of reasons, receive circuit 24 as the master may determine that it should no longer be active.  
20 This determination may be made based on the receipt at receive circuits 24, 26 of management traffic passed through or injected in the communication path from signal source 13 to node 18. For example, node 14 may detect an AIS condition between node 12 and node 14 due to, for  
25 example, an optical fiber cut. In this situation, node 14 inserts management traffic for transmission to node 18 through node 16. Receive circuit 24 receives the management traffic and determines that receive circuit 26 should be active. Receive circuit 24, still acting as  
30 master, sets the qualification bit in the table

maintained by decision module 30 to indicate that receive circuit 24 is stand-by, and sends a message using bus 34 or link 38 to command receive circuit 26 to operate as active. Receive circuit 26 sets the qualification bit in the table maintained by decision module 32 to indicate that receive circuit 26 is active, and begins passing bytes to be stored by memory 20 for communication to TDM switch 22.

A similar operation can take place if receive circuit 24 receives management or overhead traffic containing BER, SD, or other qualification criteria for the particular VT. This overhead or management traffic may either be sent as bad messages to indicate a degrade or loss in signal, or as periodic polling messages that, if absent, may indicate a degrade or loss in signal. Moreover, receive circuit 26 may perform a switch-over to active upon the detection of a loss of a keep-alive signal from receive circuit 24 over link 38. Therefore, receive circuits 24, 26 contemplate both VT level and card or circuit level metrics for qualification of signals. In any of these various embodiments, receive circuits 24, 26 communicate over bus 34 and/or link 38 to allow decision modules 30, 32 to determine the active/stand-by status of receive circuits 24, 26.

If SONET UPSR is being applied to STS-1 type blocks (possibly forming larger STS-N signals), the same general approach can be applied. That is, TDM switch 22 can be configured to switch through both copies of an STS-1 block arriving in two directions around a UPSR ring. STS-1 path level performance indications are used by

receive circuits 24, 26 to determine in a distributed manner which should set kill-bits to force the discard of its copy of the STS-1.

5 This UPSR approach, whether used for TDM or STS-1 traffic, can be generalized to select between two copies of any traffic stream coming from any two directions, regardless of whether or not the two traffic streams actually pass over SONET rings or other network configurations. This approach can be further generalized  
10 to select between traffic from a number of sources (more than two), including from redundant switches within the same unit.

Although the present invention has been described with several embodiments, a myriad of changes, variations, alterations, transformations, and  
15 modifications may be suggested to one skilled in the art, and it is intended that the present invention encompass such changes, variations, alterations, transformations, and modifications as fall within the scope of the  
20 appended claims.

WHAT IS CLAIMED IS:

1. In a TDM network having a plurality of switchable paths to a common destination, a method comprising:

5 receiving TDM traffic from a traffic source as a plurality of copies of traffic routed along a plurality of paths, each one of said paths having a receive circuit;

10 configuring a TDM switch to provide a route to a common destination for each one of the paths;

determining a qualified copy of the traffic; and

15 discarding all copies of the traffic except for the qualified copy such that only the qualified copy is passed to the TDM switch for routing to the common destination.

20 2. The method of Claim 1, wherein determining comprises receiving management traffic on a path indicating a degradation or loss of signal on the path.

25 3. The method of Claim 1, wherein determining comprises detecting a loss of a keep-alive signal at one of the respective receive circuits.

4. The method of Claim 1, wherein determining is based upon the following criteria:

alarm indication signal (AIS),

loss of pointer (LOP), or

5 missing terminating circuit card; thereafter

bit error rate (BER) exceeding  $10^{-3}$  in the path;  
thereafter

signal degradation (SD) resulting from a BER  
exceeding  $10^{-5}$  to  $10^{-9}$ .

10

5. The method of Claim 1, wherein discarding comprises setting a kill-bit to indicate whether the traffic should be switched through or discarded.

15

6. The method of Claim 1, wherein determining comprises communicating information related to qualifying between the respective receive circuits.

20

7. The method of Claim 1, wherein the paths comprise a first path in a first direction around a SONET UPSR and a second path in a second direction around the SONET UPSR.

25

8. The method of Claim 1, wherein the TDM traffic is carried in VT or STS-1 formats within a transmission signal.

54402-10000



9. The method of Claim 1, wherein the TDM switch is configured to route TDM traffic for a given virtual tributary (VT) from each respective receive circuit to the common destination.

10. In a TDM network having a plurality of paths to a destination, an apparatus comprising:

a plurality of receive circuits coupled to monitor signals on respective paths to a TDM switch, each receive circuit operable to set a kill-bit to accompany TDM traffic sent to the TDM switch to indicate whether the TDM traffic should be switched or discarded;

a memory coupled to the receive circuits and operable to receive the TDM traffic with accompanying kill-bits, the memory operable to store the TDM traffic having an accompanying kill-bit that has not been set, the memory further operable to discard the TDM traffic having an accompanying kill-bit that has been set; and

a communication path between the receive circuits and operable to convey qualifying information for the paths.

11. The apparatus of Claim 10, wherein each receive circuit is operable to qualify TDM traffic by receiving management traffic on a path indicating a degradation or loss of signal on the path.

12. The apparatus of Claim 10, wherein each receive circuit is operable to qualify TDM traffic by detecting a loss of a keep-alive signal of another receive circuit.

13. The apparatus of Claim 10, wherein each receive circuit qualifies the TDM traffic based upon the following criteria:

5       alarm indication signal (AIS),  
      loss of pointer (LOP), or  
      missing terminating circuit card; thereafter  
      bit error rate (BER) exceeding  $10^{-3}$  in the path;  
thereafter  
      signal degradation (SD) resulting from a BER  
10    exceeding  $10^{-5}$  to  $10^{-9}$ .

14. The apparatus of Claim 10, wherein each receive circuit is further operable to:

15       receive TDM traffic associated with a virtual  
      tributary (VT);  
      determine if the TDM traffic is pass-through based  
      on the VT; and  
      if the TDM traffic is not pass-through, set an  
      accompanying kill-bit if the receive circuit is stand-by  
20    for the particular VT.

15       15. The apparatus of Claim 10, wherein the paths  
      comprise a first path in a first direction around a SONET  
      UPSR and a second path in a second direction around the  
25    SONET UPSR.

      16. The apparatus of Claim 10, wherein the TDM  
      traffic is carried in VT or STS-1 formats within a  
      transmission signal.

30

062891.0340

17. The apparatus of Claim 10, wherein the TDM switch is configured to route TDM traffic for a given virtual tributary (VT) from each receive circuit to the destination.

[illegible][illegible][illegible][illegible]

1. **Introduction**  
 2. **Background**  
 3. **Methodology**  
 4. **Results**  
 5. **Discussion**  
 6. **Conclusion**  
 7. **References**  
 8. **Appendix**  
 9. **Tables**  
 10. **Figures**  
 11. **Supplementary Materials**  
 12. **Notes**  
 13. **Abbreviations**  
 14. **Conflicts of Interest**  
 15. **Acknowledgments**  
 16. **Author Contributions**  
 17. **Funding**  
 18. **Data Availability**  
 19. **References**  
 20. **Appendix**  
 21. **Tables**  
 22. **Figures**  
 23. **Supplementary Materials**  
 24. **Notes**  
 25. **Abbreviations**  
 26. **Conflicts of Interest**  
 27. **Acknowledgments**  
 28. **Author Contributions**  
 29. **Funding**  
 30. **Data Availability**  
 31. **References**  
 32. **Appendix**  
 33. **Tables**  
 34. **Figures**  
 35. **Supplementary Materials**  
 36. **Notes**  
 37. **Abbreviations**  
 38. **Conflicts of Interest**  
 39. **Acknowledgments**  
 40. **Author Contributions**  
 41. **Funding**  
 42. **Data Availability**  
 43. **References**  
 44. **Appendix**  
 45. **Tables**  
 46. **Figures**  
 47. **Supplementary Materials**  
 48. **Notes**  
 49. **Abbreviations**  
 50. **Conflicts of Interest**  
 51. **Acknowledgments**  
 52. **Author Contributions**  
 53. **Funding**  
 54. **Data Availability**  
 55. **References**  
 56. **Appendix**  
 57. **Tables**  
 58. **Figures**  
 59. **Supplementary Materials**  
 60. **Notes**  
 61. **Abbreviations**  
 62. **Conflicts of Interest**  
 63. **Acknowledgments**  
 64. **Author Contributions**  
 65. **Funding**  
 66. **Data Availability**  
 67. **References**  
 68. **Appendix**  
 69. **Tables**  
 70. **Figures**  
 71. **Supplementary Materials**  
 72. **Notes**  
 73. **Abbreviations**  
 74. **Conflicts of Interest**  
 75. **Acknowledgments**  
 76. **Author Contributions**  
 77. **Funding**  
 78. **Data Availability**  
 79. **References**  
 80. **Appendix**  
 81. **Tables**  
 82. **Figures**  
 83. **Supplementary Materials**  
 84. **Notes**  
 85. **Abbreviations**  
 86. **Conflicts of Interest**  
 87. **Acknowledgments**  
 88. **Author Contributions**  
 89. **Funding**  
 90. **Data Availability**  
 91. **References**  
 92. **Appendix**  
 93. **Tables**  
 94. **Figures**  
 95. **Supplementary Materials**  
 96. **Notes**  
 97. **Abbreviations**  
 98. **Conflicts of Interest**  
 99. **Acknowledgments**  
 100. **Author Contributions**  
 101. **Funding**  
 102. **Data Availability**  
 103. **References**  
 104. **Appendix**  
 105. **Tables**  
 106. **Figures**  
 107. **Supplementary Materials**  
 108. **Notes**  
 109. **Abbreviations**  
 110. **Conflicts of Interest**  
 111. **Acknowledgments**  
 112. **Author Contributions**  
 113. **Funding**  
 114. **Data Availability**  
 115. **References**  
 116. **Appendix**  
 117. **Tables**  
 118. **Figures**  
 119. **Supplementary Materials**  
 120. **Notes**  
 121. **Abbreviations**  
 122. **Conflicts of Interest**  
 123. **Acknowledgments**  
 124. **Author Contributions**  
 125. **Funding**  
 126. **Data Availability**  
 127. **References**  
 128. **Appendix**  
 129. **Tables**  
 130. **Figures**  
 131. **Supplementary Materials**  
 132. **Notes**  
 133. **Abbreviations**  
 134. **Conflicts of Interest**  
 135. **Acknowledgments**  
 136. **Author Contributions**  
 137. **Funding**  
 138. **Data Availability**  
 139. **References**  
 140. **Appendix**  
 141. **Tables**  
 142. **Figures**  
 143. **Supplementary Materials**  
 144. **Notes**  
 145. **Abbreviations**  
 146. **Conflicts of Interest**  
 147. **Acknowledgments**  
 148. **Author Contributions**  
 149. **Funding**  
 150. **Data Availability**  
 151. **References**  
 152. **Appendix**  
 153. **Tables**  
 154. **Figures**  
 155. **Supplementary Materials**  
 156. **Notes**  
 157. **Abbreviations**  
 158. **Conflicts of Interest**  
 159. **Acknowledgments**  
 160. **Author Contributions**  
 161. **Funding**  
 162. **Data Availability**  
 163. **References**  
 164. **Appendix**  
 165. **Tables**  
 166. **Figures**  
 167. **Supplementary Materials**  
 168. **Notes**  
 169. **Abbreviations**  
 170. **Conflicts of Interest**  
 171. **Acknowledgments**  
 172. **Author Contributions**  
 173. **Funding**  
 174. **Data Availability**  
 175. **References**  
 176. **Appendix**  
 177. **Tables**  
 178. **Figures**  
 179. **Supplementary Materials**  
 180. **Notes**  
 181. **Abbreviations**  
 182. **Conflicts of Interest**  
 183. **Acknowledgments**  
 184. **Author Contributions**  
 185. **Funding**  
 186. **Data Availability**  
 187. **References**  
 188. **Appendix**  
 189. **Tables**  
 190. **Figures**  
 191. **Supplementary Materials**  
 192. **Notes**  
 193. **Abbreviations**  
 194. **Conflicts of Interest**  
 195. **Acknowledgments**  
 196. **Author Contributions**  
 197. **Funding**  
 198. **Data Availability**  
 199. **References**  
 200. **Appendix**  
 201. **Tables**  
 202. **Figures**  
 203. **Supplementary Materials**  
 204. **Notes**  
 205. **Abbreviations**  
 206. **Conflicts of Interest**  
 207. **Acknowledgments**  
 208. **Author Contributions**  
 209. **Funding**  
 210. **Data Availability**  
 211. **References**  
 212. **Appendix**  
 213. **Tables**  
 214. **Figures**  
 215. **Supplementary Materials**  
 216. **Notes**  
 217. **Abbreviations**  
 218. **Conflicts of Interest**  
 219. **Acknowledgments**  
 220. **Author Contributions**  
 221. **Funding**  
 222. **Data Availability**  
 223. **References**  
 224. **Appendix**  
 225. **Tables**  
 226. **Figures**  
 227. **Supplementary Materials**  
 228. **Notes**  
 229. **Abbreviations**  
 230. **Conflicts of Interest**  
 231. **Acknowledgments**  
 232. **Author Contributions**  
 233. **Funding**  
 234. **Data Availability**  
 235. **References**  
 236. **Appendix**  
 237. **Tables**  
 238. **Figures**  
 239. **Supplementary Materials**  
 240. **Notes**  
 241. **Abbreviations**  
 242. **Conflicts of Interest**  
 243. **Acknowledgments**  
 244. **Author Contributions**  
 245. **Funding**  
 246. **Data Availability**  
 247. **References**  
 248.

[illegible]

1. **Introduction**  
 2. **Background**  
 3. **Methodology**  
 4. **Results**  
 5. **Discussion**  
 6. **Conclusion**  
 7. **References**  
 8. **Appendix**  
 9. **Figure 1**  
 10. **Figure 2**  
 11. **Figure 3**  
 12. **Figure 4**  
 13. **Figure 5**  
 14. **Figure 6**  
 15. **Figure 7**  
 16. **Figure 8**  
 17. **Figure 9**  
 18. **Figure 10**  
 19. **Figure 11**  
 20. **Figure 12**  
 21. **Figure 13**  
 22. **Figure 14**  
 23. **Figure 15**  
 24. **Figure 16**  
 25. **Figure 17**  
 26. **Figure 18**  
 27. **Figure 19**  
 28. **Figure 20**  
 29. **Figure 21**  
 30. **Figure 22**  
 31. **Figure 23**  
 32. **Figure 24**  
 33. **Figure 25**  
 34. **Figure 26**  
 35. **Figure 27**  
 36. **Figure 28**  
 37. **Figure 29**  
 38. **Figure 30**  
 39. **Figure 31**  
 40. **Figure 32**  
 41. **Figure 33**  
 42. **Figure 34**  
 43. **Figure 35**  
 44. **Figure 36**  
 45. **Figure 37**  
 46. **Figure 38**  
 47. **Figure 39**  
 48. **Figure 40**  
 49. **Figure 41**  
 50. **Figure 42**  
 51. **Figure 43**  
 52. **Figure 44**  
 53. **Figure 45**  
 54. **Figure 46**  
 55. **Figure 47**  
 56. **Figure 48**  
 57. **Figure 49**  
 58. **Figure 50**  
 59. **Figure 51**  
 60. **Figure 52**  
 61. **Figure 53**  
 62. **Figure 54**  
 63. **Figure 55**  
 64. **Figure 56**  
 65. **Figure 57**  
 66. **Figure 58**  
 67. **Figure 59**  
 68. **Figure 60**  
 69. **Figure 61**  
 70. **Figure 62**  
 71. **Figure 63**  
 72. **Figure 64**  
 73. **Figure 65**  
 74. **Figure 66**  
 75. **Figure 67**  
 76. **Figure 68**  
 77. **Figure 69**  
 78. **Figure 70**  
 79. **Figure 71**  
 80. **Figure 72**  
 81. **Figure 73**  
 82. **Figure 74**  
 83. **Figure 75**  
 84. **Figure 76**  
 85. **Figure 77**  
 86. **Figure 78**  
 87. **Figure 79**  
 88. **Figure 80**  
 89. **Figure 81**  
 90. **Figure 82**  
 91. **Figure 83**  
 92. **Figure 84**  
 93. **Figure 85**  
 94. **Figure 86**  
 95. **Figure 87**  
 96. **Figure 88**  
 97. **Figure 89**  
 98. **Figure 90**  
 99. **Figure 91**  
 100. **Figure 92**  
 101. **Figure 93**  
 102. **Figure 94**  
 103. **Figure 95**  
 104. **Figure 96**  
 105. **Figure 97**  
 106. **Figure 98**  
 107. **Figure 99**  
 108. **Figure 100**  
 109. **Figure 101**  
 110. **Figure 102**  
 111. **Figure 103**  
 112. **Figure 104**  
 113. **Figure 105**  
 114. **Figure 106**  
 115. **Figure 107**  
 116. **Figure 108**  
 117. **Figure 109**  
 118. **Figure 110**  
 119. **Figure 111**  
 120. **Figure 112**  
 121. **Figure 113**  
 122. **Figure 114**  
 123. **Figure 115**  
 124. **Figure 116**  
 125. **Figure 117**  
 126. **Figure 118**  
 127. **Figure 119**  
 128. **Figure 120**  
 129. **Figure 121**  
 130. **Figure 122**  
 131. **Figure 123**  
 132. **Figure 124**  
 133. **Figure 125**  
 134. **Figure 126**  
 135. **Figure 127**  
 136. **Figure 128**  
 137. **Figure 129**  
 138. **Figure 130**  
 139. **Figure 131**  
 140. **Figure 132**  
 141. **Figure 133**  
 142. **Figure 134**  
 143. **Figure 135**  
 144. **Figure 136**  
 145. **Figure 137**  
 146. **Figure 138**  
 147. **Figure 139**  
 148. **Figure 140**  
 149. **Figure 141**  
 150. **Figure 142**  
 151. **Figure 143**  
 152. **Figure 144**  
 153. **Figure 145**  
 154. **Figure 146**  
 155. **Figure 147**  
 156. **Figure 148**  
 157. **Figure 149**  
 158. **Figure 150**  
 159. **Figure 151**  
 160. **Figure 152**  
 161. **Figure 153**  
 162. **Figure 154**  
 163. **Figure 155**  
 164. **Figure 156**  
 165. **Figure 157**  
 166. **Figure 158**  
 167. **Figure 159**  
 168. **Figure 160**  
 169. **Figure 161**  
 170. **Figure 162**  
 171. **Figure 163**  
 172. **Figure 164**  
 173. **Figure 165**  
 174. **Figure 166**  
 175. **Figure 167**  
 176. **Figure 168**  
 177. **Figure 169**  
 178. **Figure 170**  
 179. **Figure 171**  
 180. **Figure 172**  
 181. **Figure 173**  
 182. **Figure 174**  
 183. **Figure 175**  
 184. **Figure 176**  
 185. **Figure 177**  
 186. **Figure 178**  
 187. **Figure 179**  
 188. **Figure 180**  
 189. **Figure 181**  
 190. **Figure 182**  
 191. **Figure 183**  
 192. **Figure 184**  
 193. **Figure 185**  
 194. **Figure 186**  
 195. **Figure 187**  
 196. **Figure 188**  
 197. **Figure 189**  
 198. **Figure 190**  
 199. **Figure 191**  
 200. **Figure 192**  
 201. **Figure 193**  
 202. **Figure 194**  
 203. **Figure 195**  
 204. **Figure 196**  
 205. **Figure 197**  
 206. **Figure 198**  
 207. **Figure 199**  
 208. **Figure 200**  
 209. **Figure 201**  
 210. **Figure 202**  
 211. **Figure 203**  
 212. **Figure 204**  
 213. **Figure 205**  
 214. **Figure 206**  
 215. **Figure 207**  
 216. **Figure 208**  
 217. **Figure 209**

21. The program of Claim 18, wherein determining is based upon the following criteria:

alarm indication signal (AIS),

loss of pointer (LOP), or

5 missing terminating circuit card; thereafter

bit error rate (BER) exceeding  $10^{-3}$  in the path;  
thereafter

signal degradation (SD) resulting from a BER  
exceeding  $10^{-5}$  to  $10^{-9}$ .

10

22. The program of Claim 18, wherein discarding comprises setting a kill-bit to indicate whether the traffic should be switched through or discarded.

15

23. The program of Claim 18, wherein determining comprises communicating information related to qualifying to another receive circuit.

20

24. The program of Claim 18, wherein the paths comprise a first path in a first direction around a SONET UPSR and a second path in a second direction around the SONET UPSR.

25

25. The program of Claim 18, wherein the TDM traffic is carried in VT or STS-1 formats within a transmission signal.

03414032-106639



26. The program of Claim 18, wherein the TDM switch is configured to route TDM traffic for a given virtual tributary (VT) from each of the paths to the destination.

METHOD FOR USING A PRE-CONFIGURED TDM SWITCH AND  
TRAFFIC DISCARD TO FACILITATE UPSR SELECTION

ABSTRACT OF THE DISCLOSURE

5 A TDM switch is configured to route TDM traffic from two receive circuits to a destination. One copy of the traffic is discarded, and a memory selectively stores the other copy for routing to the TDM switch. Receive circuits contemplate both virtual tributary (VT) level and card or circuit level metrics for qualification of signals.



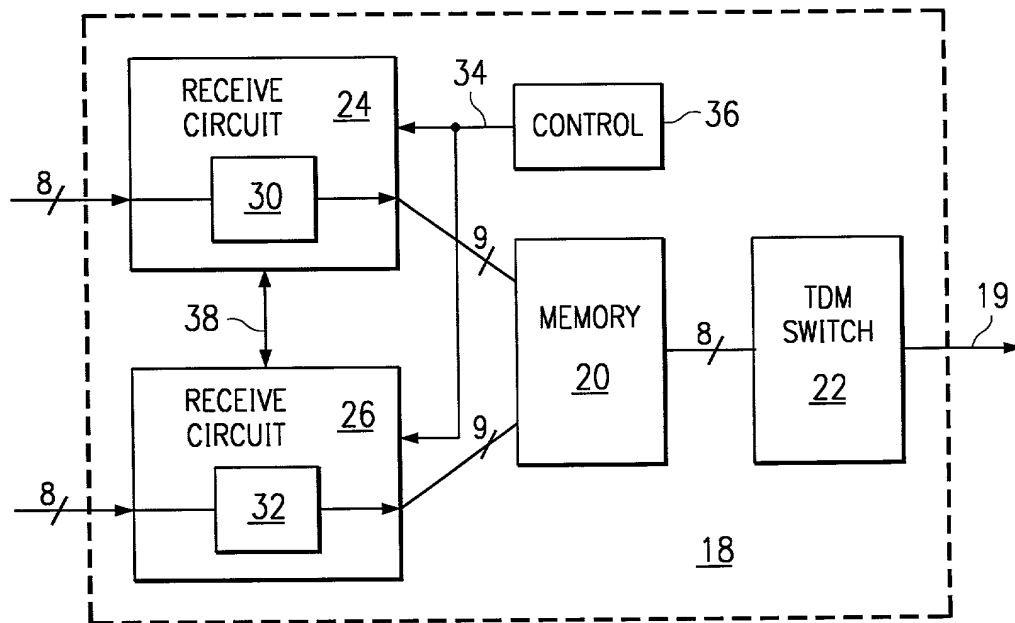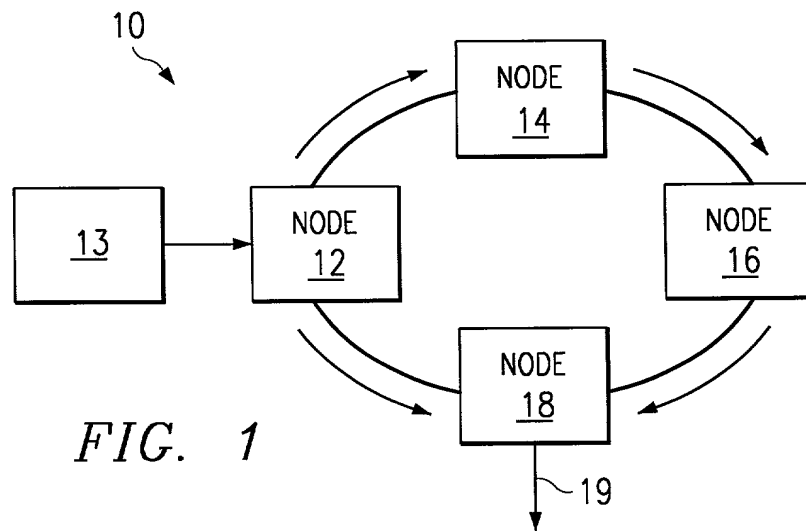

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention or design entitled METHOD FOR USING A PRE-CONFIGURED TDM SWITCH AND TRAFFIC DISCARD TO FACILITATE UPSR SELECTION the specification of which is attached hereto; that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Priority Claimed</u> <u>(Yes) (No)</u>
-----NONE-----			

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the

filing date of the prior application(s) and the national or PCT international filing date of this application:

<u>Application</u> <u>Serial Number</u>	<u>Date Filed</u>	<u>Status</u>
-----NONE-----		

I hereby appoint:

Jerry W. Mills	Reg. No. 23,005
Robert M. Chiaviello, Jr.	Reg. No. 32,461
Samir A. Bhavsar	Reg. No. 41,617
James L. Baudino	Reg. No. 43,486
Thomas R. Felger	Reg. No. 28,842
Charles S. Fish	Reg. No. 35,870
Robert W. Holland	Reg. No. 40,020
Wei Wei Jeang	Reg. No. 33,305
Jay B. Johnson	Reg. No. 38,193
Christopher W. Kennerly	Reg. No. 40,675
Tara D. Knapp	Reg. No. 43,723
Douglas M. Kubehl	Reg. No. 41,915
Ann C. Livingston	Reg. No. 32,479
Kevin J. Meek	Reg. No. 33,738
Harold E. Meier	Reg. No. 22,428
Randall W. Mishler	Reg. No. 42,006
Scott T. Morris	Reg. No. 43,818
Barton E. Showalter	Reg. No. 38,302
T. Murray Smith	Reg. No. 30,222
Terry J. Stalford	Reg. No. 39,522
David G. Wille	Reg. No. 38,363
Bradley P. Williams	Reg. No. 40,227
Rodger L. Tate	Reg. No. 27,399
Scott F. Partridge	Reg. No. 28,142
James B. Arpin	Reg. No. 33,470
James Remenick	Reg. No. 36,902
Roger J. Fulghum	Reg. No. 39,678
Thomas R. Nesbitt, Jr.	Reg. No. 22,075
James J. Maune	Reg. No. 26,946

all of the firm of Baker & Botts, L.L.P., my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities under the Patent Cooperation Treaty.

Send Correspondence To:

Baker & Botts, L.L.P.  
2001 Ross Avenue  
Dallas, Texas 75201-2980

Direct Telephone Calls To:

Barton E. Showalter  
at (214) 953-6509  
Attorney Docket No. 062891.0340

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of first inventor

Kenneth M. Buckland

Inventor's signature

Kenneth M. Buckland  
10/5/99

Date

Residence (City, County, State)

Santa Rosa, Sonoma County,  
California

Citizenship

Canada

Post Office Address

2777 Yulupa Avenue, #287  
Santa Rosa, California  
95405

Full name of second inventor

Riccardo G. Dorbolo

Inventor's signature

Riccardo G. Dorbolo  
Oct 3/99

Date

Residence (City, County, State)

Petaluma, Sonoma County,  
California

Citizenship

Canada

Post Office Address


1644 Northstar Drive  
Petaluma, California 94954

062891.0340

Full name of third inventor

Robert D. Howson, Jr.

Inventor's signature

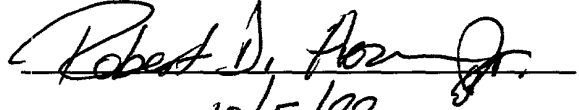  
10/5/99

Date

Residence (City, County, State)

Santa Rosa, Sonoma County,  
California

Citizenship

United States of America

Post Office Address

4811 Foxglove Court  
Santa Rosa, California 95405

0941493-10059  
669007-2804750